

FLOW SYSTEM MATIC WATER FLOW REGULATOR

INSTALLATION INSTRUCTIONS FOR **FSM** WATER FLOW METER

INCREASED PRODUCTIVITY

NEVER BEFORE SO SIMPLE

Easily and Quickly Mounted
Easily and Quickly Piped
Easily and Quickly Cleaned
Easily and Quickly Change Flow Rate

- * Improved quality of parts through precise water control,
- * Can be used with Ethylene & Propylene Glycol,
- * Quick and easy reproduce able settings when changing molds,
- * Heavy duty construction, long life,
- * Easy mounting on any make or model of machine,
- * Saves energy from faster startups,
- * Temp. gauge for each tube,
- * Flow tubes : Special polyamide nylon material (not polycarbonate) adjustable reference ring and contains brass float cone. Reference marks are molded-in, not printed on. Removes easily for cleaning

RETURN TO TOWER

Outlet


3/4" PT OR NPT
FEMALE

FROM TOWER

Inlet

RETURN FROM MOLD

TO MOLD

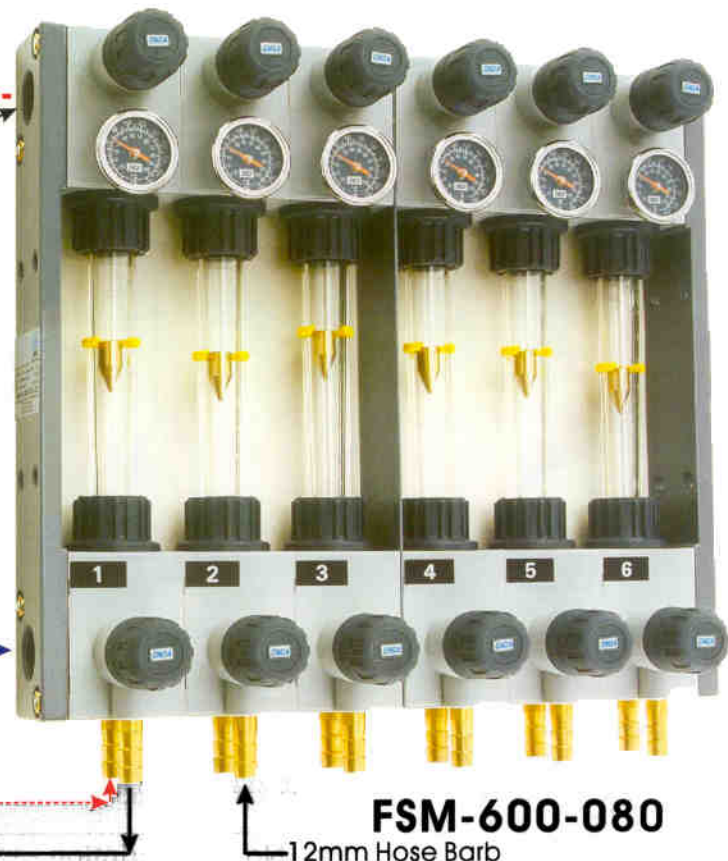

ONDA

The World For Value

ONDA PLASTIC CO., LTD.

4F, NO.80, KUAN FU ROAD SEC 2,
SANCHUNG, TAIPEI, TAIWAN

TEL : 886 2 8512 3761 FAX : 886 2 8512 3765

www.ondaplas.com E-Mail: onda@ms17.hinet.net